

--	--	--	--	--	--	--	--	--	--

MULTIMEDIA UNIVERSITY

FINAL EXAMINATION

TRIMESTER 2, 2018/2019

ECE3246 – SECURITY & CRYPTOGRAPHY
(CE, TE, ME)

11 MARCH 2019
2.30 – 4.30 pm
(2 Hours)

INSTRUCTIONS TO STUDENT

1. This examination paper consists of 6 pages including the cover page with 4 questions only.
2. Attempt **any THREE** out of **FOUR** questions. All questions carry equal marks and the distribution of the marks for each question is given.
3. Please print all your answers in the Answer Booklet provided.

Question 1

- a) Describe your understanding of the following *security concepts*:
- (i) *cipher mode of operation* [3 marks]
 - (ii) *one-wayness* [3 marks]
- b) (i) Discuss the reasons why a *block cipher* and a *message authentication code* (MAC) are **not** considered as *public-key cryptography* (PKC) techniques. [3 marks]
- (ii) Discuss the reasons why all *round functions* of a *block cipher* need to be keyed by a *round key*. [3 marks]
- c)

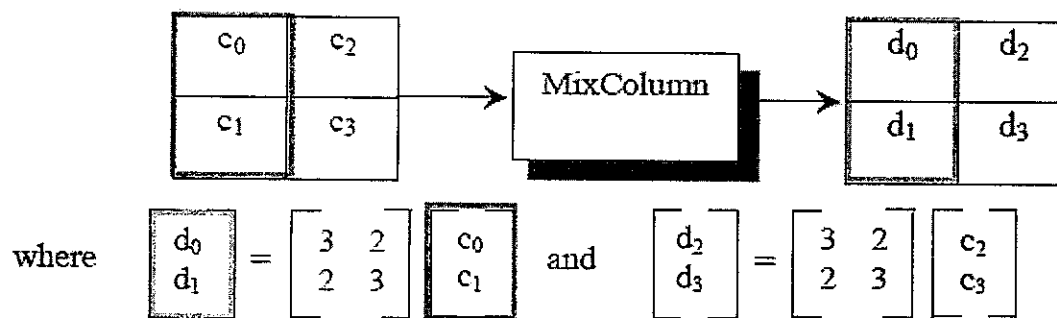


Figure 1 MixColumns operation of Mini-AES

Recall the *MixColumn* (MC) and *AddRoundkey* (AR) operations of Mini-AES. MC is performed as per Figure 1, i.e. each column of the input matrix is taken as a column vector to be matrix multiplied with a constant matrix (3,2;2,3).

Firstly, when one input (c_0, c_1, c_2, c_3) is processed by *MixColumn*, its output denoted by (d_0, d_1, d_2, d_3) is produced.

Question: Secondly, if a slightly different input (x_0, c_1, c_2, c_3) is put through *MixColumn* to get the output (y_0, y_1, y_2, y_3) , i.e. only the first element x_0 of the second input is different from c_0 of the first input, while the others c_1, c_2, c_3 remain the same; discuss which elements of the second output (y_0, y_1, y_2, y_3) will be **different** from the first output (d_0, d_1, d_2, d_3) and why. [8 marks]

Continued...

Question 2

- a) *Biometrics* is a type of '**what you are**' factor used for authentication. In comparison with the '**what you know**' factor for authentication, discuss which type is easier/harder to be *accessed/known* by the attacker, as well as which type is easier/harder to be *forged/reproduced* by the attacker. [3+3 marks]
- b) A hash function $h()$ is typically applied to an input message m before it is signed by a digital signature function $Sign()$, i.e. the signature output $sig = Sign(h(m))$. Given two different input messages $m1$ and $m2$, leading to outputs $sig1$ and $sig2$, discuss using these symbols, why it is important for the hash function $h()$ to have the property of **collision-resistance**.

[6 marks]

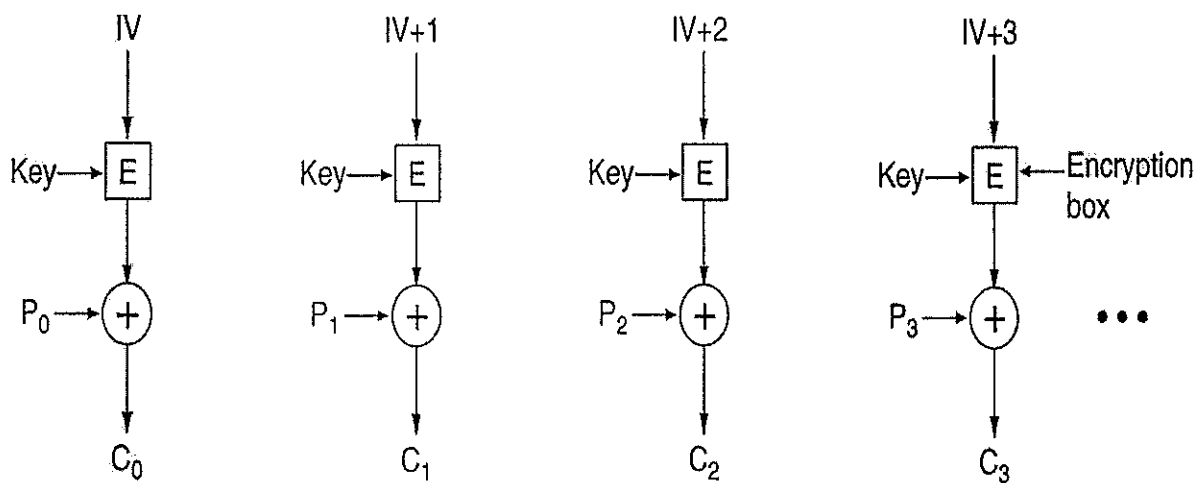


Figure 2 [sourced from http://homepage.smc.edu/morgan_david/linsec]

- c) Figure 2 illustrates an *operation mode* for a *block cipher E*.
- Discuss whether this operation is **invertible** or not. [4 marks]
 - Discuss what happens at the receiver side when an attacker has mounted a *replacement attack* to replace block C_0 while the other blocks remain unchanged. [4 marks]

Continued...

Question 3

- a) (i) Describe the basic idea behind the **deterministic problem** exhibited by *textbook RSA*. [3 marks]

- (ii) Describe how *public key cryptography* could solve the **key distribution problem**. [3 marks]

- b) The *RSA public key cipher* performs encryption defined as follows

$$c = m^e \bmod n$$

where c is the ciphertext, m the plaintext, e the public key and n the modulus, and decryption is defined as

$$m = c^d \bmod n.$$

Given that the public key e is 7, private key d is 23, and modulus n is 55; show how a plaintext $m = 8$ can be *encrypted*. [6 marks]

- c) A *homomorphic encryption* scheme $E(\cdot)$ is said to satisfy the following type of property:

$$E(m1) \cdot E(m2) = E(m1 \cdot m2) \text{ for some operation denoted by } \cdot$$

The encryption function of the **Paillier** encryption scheme is given as follows, where g and n are public parameters, and r is an ephemeral random number which differs each time the encryption function is called:

$$c = g^m \cdot r^n \bmod n^2$$

Show by using appropriate example symbols e.g. $m1, m2, \dots, c1, c2, \dots$ why Paillier has the **homomorphic property**. [8 marks]

Continued...

Question 4

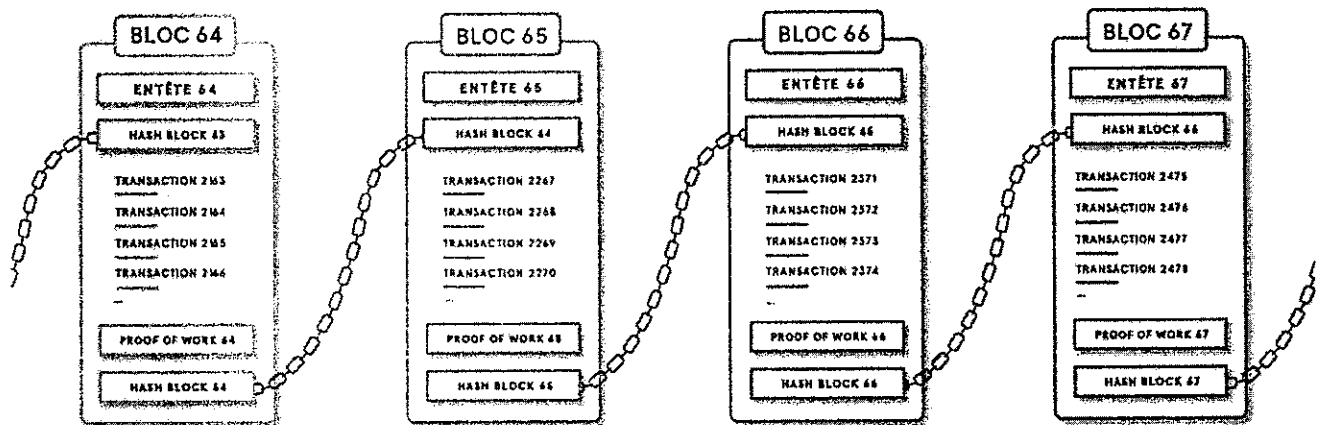


Figure 3 [sourced from <https://blog.theodo.fr>]

a) Figure 3 shows the sketch of a *block chain*.

(i) Describe your understanding of what is a block chain. [3 marks]

(ii) What cryptographic functions are used in a block chain? Explain. [3 marks]

b)

(i) Discuss your understanding of the concept of *anomaly detection* and how that relates to *network security*. [3 marks]

(ii) Describe your understanding of the concept of *computations in the encrypted domain* and how that relates to *cloud security*. [3 marks]

Continued...

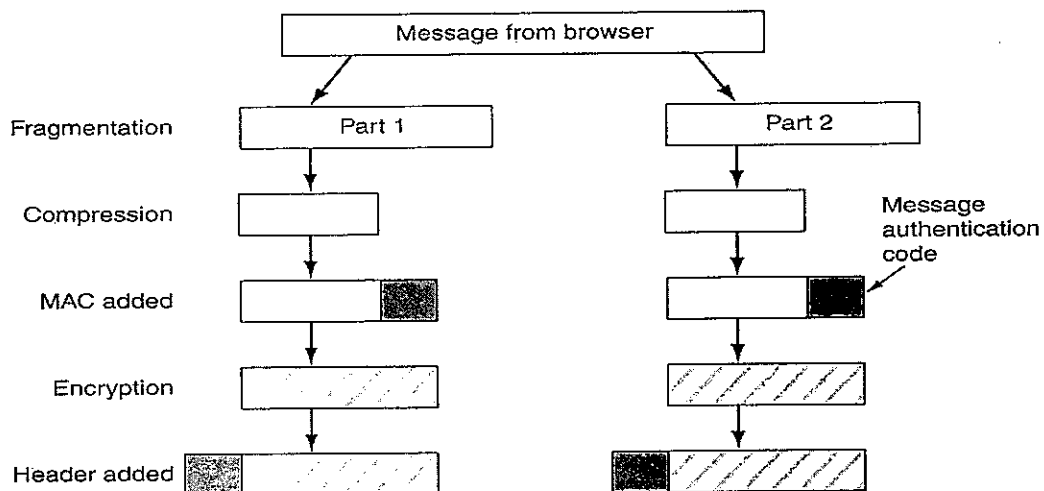


Figure 4

c)

Figure 4 shows the *Transport Sub-protocol* of the Secure Sockets Layer (SSL), in particular the operations performed at the sender side. More precisely, for fragment m_1 , the following is computed and sent to the recipient:

$$z = \text{header} \parallel \text{Encrypt}(\text{Compress}(m_1) \parallel \text{MAC}(m_1))$$

- (i) Note that MAC is performed before Encryption; this approach is so-called *authenticate-then-encrypt* (AtE). Describe your understanding of how this works at the **transmitting side**. [4 marks]
- (ii) Consequently, discuss what happens at the **receiving side** for this approach of *authenticate-then-encrypt* (AtE). [4 marks]

End of Paper

